

# Wheel Load Scale WL 108



## The next generation: wireless, battery life up to 180 hours, backlight display

The new state-of-the-art wheel load scale from HAENNI: Certified to OIML R76 class III. Easy to carry due to its light weight. Without need of ramps and connectors, it is ready for use at any time. Due to fieldbus interface and the wireless option, less or no cables are needed. A must have for demanding professionals.

<b>Application</b>	Measurement of wheel and axle loads of vehicles with pneumatic tires
<b>Platform Size</b>	Standard size for accommodating easily a dual tire, XL for weighing heavy haulage vehicles.
<b>Ranges</b>	0...2 t, 0...3 t, 0...10 t, 0...15 t
<b>Temp. range</b>	-20...+60 °C
<b>Accuracy</b>	OIML No. 76 Class III, optionally with HAENNI works test report or intended for official test
<b>Execution</b>	Corrosion resistant aluminium alloys, water resistant IP 65
<b>Supply</b>	Integrated rechargeable power source, for 180 h operation. Recharge (and operation) by 12V car battery or AC adapter
<b>In- and output</b>	Cable, Wireless
<b>Display</b>	LCD, 24 mm, graphic, with backlight
<b>Electrical connection</b>	Robust plug, watertight IEC 60130-10 5.5 mm / 2.1 mm
<b>Weight</b>	13.5 kg (0...2 t, 0...3 t) 16.5 kg (0...10 t, 0...15 t) 28.5 kg (XL)
<b>Platform height</b>	19 mm (0...2 t, 0...3 t) 17 mm (0...10 t, 0...15 t)

### Operation

Due to its light weight, the wheel load scale WL 108 is easy to transport and can be used at any time without the need of ramps.

For efficient measurements it is recommended to work with at least two units. Measurements should be made on firm and level ground. The scale is placed close in front of the wheel to be tested and the vehicle is driven onto the platform. The wheel load is indicated directly on the digital liquid crystal display.

With a connecting cable or wireless, up to 12 scales can be used as an axle or total load scale.

### Accessories

For accessories as levelling mats, cables, pads for weighing point loads, carrying cases etc. refer to data sheet A8498.

### Official Test

The wheel load scale WL 108 is tested and certified by OIML<sup>1)</sup> and by EC Type Approval.


### Selection Chart

<b>Ordering example:</b>		<b>WL 108 / 4 1 1 . 1 1 /10Y/ . . .</b>			
<b>Temperature</b>	-20 ... +60 °C	<b>4</b>			
<b>and Standard</b>	OIML No. 76 Cl. III	<b>1</b>			
<b>Division</b>	Standard	<b>1</b>			
	Smaller <sup>3)</sup>	<b>3</b>			
<b>Platform Size</b>	Standard (small)	<b>1</b>			
	XL	<b>9</b>			
<b>Connections</b>	Cable (standard)	<b>1</b>			
	Wireless (+cable)	<b>2</b>			
<b>Ranges</b>	0 ... 2 t				<b>08Y</b>
	0 ... 3 t				<b>19Y</b>
	0 ... 10 t				<b>10Y</b>
	0 ... 15 t				<b>20Y</b>
<b>Options</b>	Heavy duty ground plate with rubber base				<b>802</b>
	For official test. The ordering code is determined after the approval procedure				



# Wheel Load Scale WL 108

## Dimensions

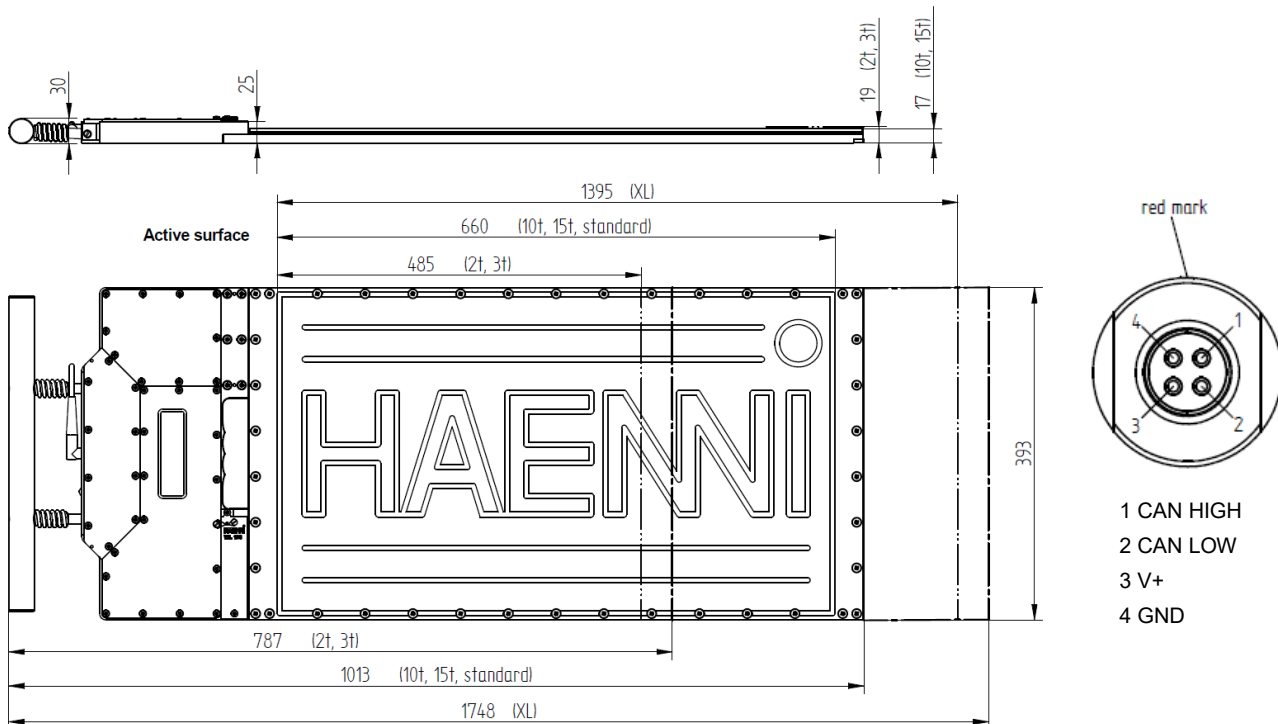

## Technical Specification

Range	0...2 t		0...3 t	0...10 t		0...15 t	
Division (standard / smaller <sup>3)</sup> )	10 kg	5 kg	10 kg	50 kg	20 kg <sup>5)</sup>	100 kg	50 kg <sup>5)</sup>
Accuracy on calibration	standard Division		± 5 kg (up to 500 kg) ± 10 kg (500 kg..2000 kg)	± 5 kg (up to 500 kg) ± 10 kg (500 kg..2000 kg) ± 15 kg (2000 kg..3000 kg)	± 25 kg (up to 2,5 t) ± 50 kg (2,5 t..10 t)		± 50 kg (up to 5 t) ± 100 kg (5 t..15 t)
	smaller Division		± 2,5 kg (up to 250 kg) ± 5 kg (250 kg...1000 kg) ± 7,5 kg (1000 kg ...2000 kg)	—	± 10 kg (up to 1 t) ± 20 kg (1 t..4 t) ± 30 kg (4 t..10 t)		± 25 kg (up to 2,5 t) ± 50 kg (2,5 t..10 t) ± 75 kg (10 t..15 t)
in operation	twice the tolerance at calibration						
Loading limit	2,5 t		3,75 t	12,5 t		18 t	
Permissible load per area	6 kg/cm <sup>2</sup>		9 kg/cm <sup>2</sup>	12 kg/cm <sup>2</sup>		15 kg/cm <sup>2</sup>	
Loading limit per area	12 kg/cm <sup>2</sup>		18 kg/cm <sup>2</sup>	24 kg/cm <sup>2</sup>		30 kg/cm <sup>2</sup>	
Operating temperature	-20...+60 °C			-20...+60 °C			
Storage temperature	-30 .... +60 °C						
Electromagnetic susceptibility	OIML Nr. 76 <sup>1)</sup>						
Zero tracking, test etc..	automatic according OIML Nr. 76 <sup>1)</sup>						
Type of protection (ICE 144)	IP 65						
Overrunable	completely overrunable incl. cable						
Operating site	Firm and level ground, max. 10 mm bend through, max. 5% slope (≈ 3°)						
Active surface	in driving direction		345 mm	380 (12 kg/cm <sup>2</sup> ) <sup>2)</sup> 393 (6 kg/cm <sup>2</sup> ) <sup>2)</sup>		380 (15 kg/cm <sup>2</sup> ) <sup>2)</sup> 393 (6 kg/cm <sup>2</sup> ) <sup>2)</sup>	
	across to driving dir.		see sketch				
Over all dimensions	see sketch						
Power supply	Integrated battery for 180 h service <sup>4)</sup> Recharge (12 - 24) and operation (5 - 12 V) from 12V car battery or AC adapter						

1) OIML is the abbreviation for Organisation Internationale de Métrologie Légale.

2) In operation the complete surface may be used, because the ground pressure in the marginal area of the tyre foot print does not exceed 6 kg/cm<sup>2</sup>.

3) The smaller division should be chosen for specific applications only. In most applications the standard division is the better choice. Refer also to paper P 1196

4) Minimum service hours without using optional wireless and backlight. Service hours with wireless: min 120h; Service hours with wireless and backlight: min 60h

5) Not available for XL version

